

Hydraulic oils HL/HV



Hydraulic oil Doris

DORIS hydraulic oil is a mineral-based product with a high viscosity index ranging from 130 to 155, containing zinc-free anti-wear additives.

The hydraulic oil is designed for particularly demanding hydraulic systems that require a high level of lubrication and good filterability. DORIS hydraulic oil performs well in all weather conditions and throughout the year.



The properties of the oil:

- resistant to oxidation,
- provides corrosion protection,
- ensures adequate lubrication,
- exhibits resistance to high temperatures,
- is easily filterable,
- has the ability to effectively release air.



Hydraulic oils HL-46



Hydraulic oil
HL-46 1L

Hydraulic oil
HL-46 5L
STD



Hydraulic oils HL-46



Hydraulic oil
HL-46 5L
KWR

Hydraulic oils HL-46



Hydraulic oil
HL-46 5L
KWR-ZLK

DORIS
PŁYNY · OLEJE · CHEMIA

OLEJ HYDRAULICZNY
HL-46
KLASA LEPKOŚCI / VISCOSITY CLASS: SAE 46

HYDRAULIC

PL PRZEZNACZONY JEST DO STOSOWANIA W LEKKO I ŚREDNIO OBCIĄŻONYCH UKŁADACH PRZENIESIENIA SIŁY ORAZ NAPĘDU I STEROWANIA HYDRAULICZNEGO URZĄDZEŃ Z NAPĘDEM HYDROSTATYCZNYM, PRACUJĄCYCH W UMIARKOWANYCH WARUNKACH TEMPERATUROWYCH.

EN IT IS DESIGNED FOR USE IN LIGHT TO MEDIUM DUTY POWER TRANSMISSION AND HYDRAULIC DRIVE AND CONTROL SYSTEMS OF HYDROSTATIC DRIVE EQUIPMENT OPERATING UNDER MODERATE TEMPERATURE CONDITIONS.

Właściwości:

- dodatki uszczelniające zapobiegają wyciekowi i czyszczyć smarowane elementy oraz wyeliminować komputylizację z oszczelnianiem
- przeznaczony do stosowania w lekkich i średnio obciążonych układach przeniesienia siły oraz napędu i sterowania hydraulicznego
- olej HL-46 jest stosowany i zalecany z olejami hydraulicznymi w tej samej klasie lepkości i jakości

Properties:

- additives ensure the protection and cleanliness of lubricated systems and the required compatibility with seals
- for use in light to medium duty power transmission and hydraulic drive and control systems
- oil HL-46 is recommended in conjunction with hydraulic oils of the same viscosity class and quality

Nowy, specjalny/Speciale, specification:
PAG 46 4702-4 - Group II (lub wyższy) /Classification:
PAG 46 4702-450, PAF 46 1150 - HL
ISO 15724 ca.1 HL, NF/10/12/1001 up.1

5 402891 585077

DORIS
00-200 BLAZA
ul. WAPLESIŃSKA 74L, POLAND
+48 (26) 686 81 80
+48 838 797 177
ul. POLKOŃSKA 1A PL
16-100 WOLCZÓW-POLSKA PL

5L

Hydraulic oils HV-46



Hydraulic oil
HV-46 5L
STD

Hydraulic oils HV-46



Hydraulic oil
HV-46 5L
KWR

Hydraulic oils HV-46



Hydraulic oil
HV-46 5L
KWR-ZLK

Hydraulic oils HL-100




Hydraulic oil
HL-100 1L

Hydraulic oil
HL-100 5L
STD



Hydraulic oils HL-100

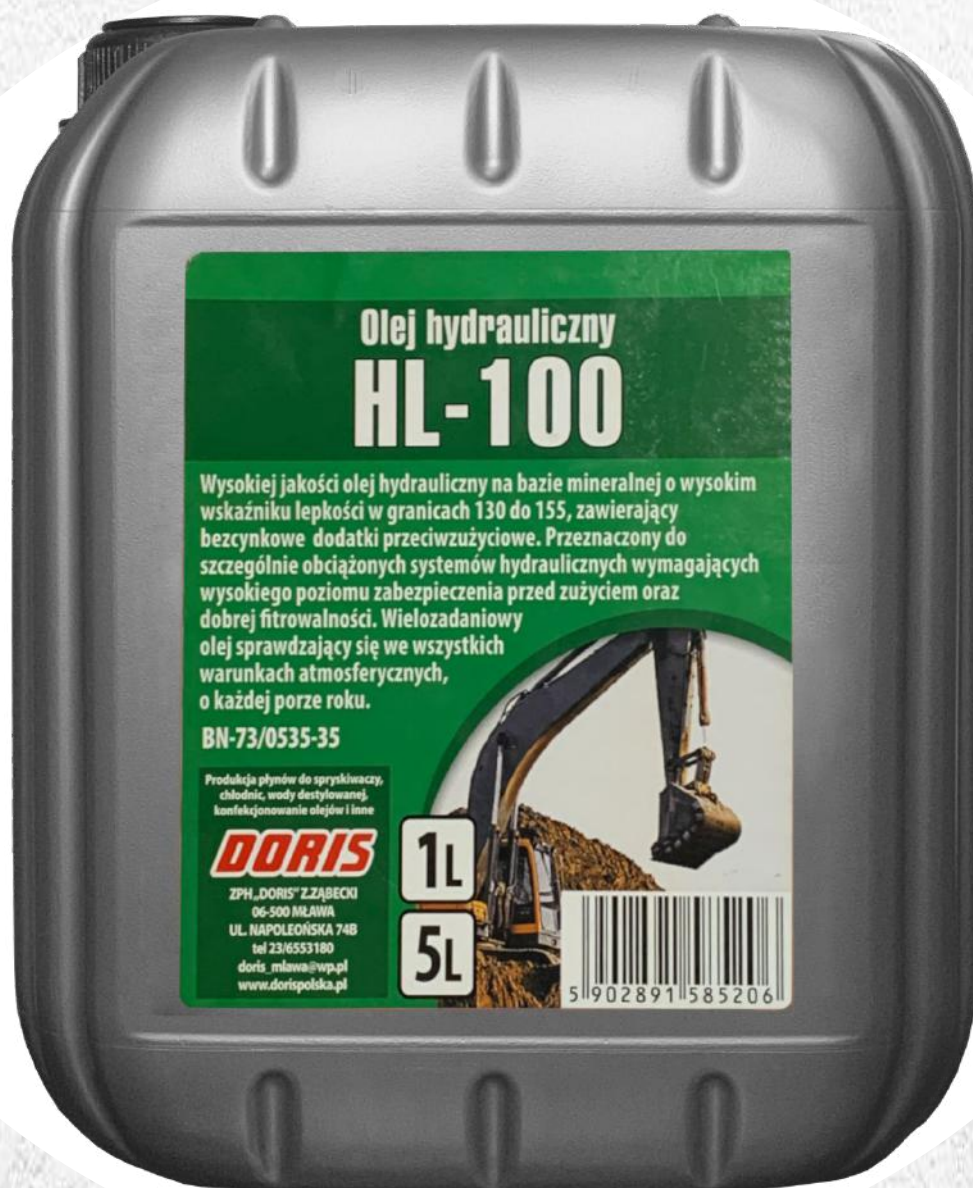

Hydraulic oil
HL-100 5L
KWR

Hydraulic oils HL-100



Hydraulic oil
HL-100 5L
KWR-ZLK

Hydraulic oils in barrels and IBCs



Products in
metal barrels



Products in IBC containers